

High Voltage Lithium-Ion Phosphate Battery storage system 76.8V120AH



Module 76.8V120AH

Basic Parameters

Capacity(kWh) 9.216

Nominal Voltage(Vdc) 76.8

Nominal Capacity(AH) 120

Voltage Range(Vdc) 67.2~86.4

Depth of Discharge 90%

Dimension(W* D* H,mm) 468×642×202 (±5)

Design Life 15+ years (25℃)

Cycle Life > 6000 (25℃)

Communication CANBUS/Modbus RTU/TCP/IP

Protection Class IP20

Weight(kg) 86g± 1kg

Operation Temperature 0~50℃

Storage Temperature -20~60℃

Product Certificate UN38.3

Main Controller : 1000V200A



Module

1000V200A

Basic Parameters

Related Product

1000V200A

AC Supply

...

System Operation Voltage (Vdc)

0~1000

Operation Current (Max.) (A)

200

Self-consumption Power(W)

8

Dimension (W* D* H, mm)

468mm*642mm*200mm (±5)

Communication

MODBUS RTU/CAN

Protection Class

IP20

Weight(kg)

20

Operation Life

15+

Operation Temperature

-20~65℃

Storage Temperature

-40~80℃

BMS Function


Protection and Alarm

Charge/Discharge End
 Charge Over Voltage
 Charge/Discharge Over Current
 High/Low Temperature
 Operation Record
 Administrator Monitor: Current,
 Voltage, Temperature, SOC&SOH.

Management and Monitor

Cells Balance
 Intelligent Charge Model
 Capacity Retention Calculate
 Isolation and Protection
 Alarm and Protection

Standard Battery cluster 691.2V 120AH

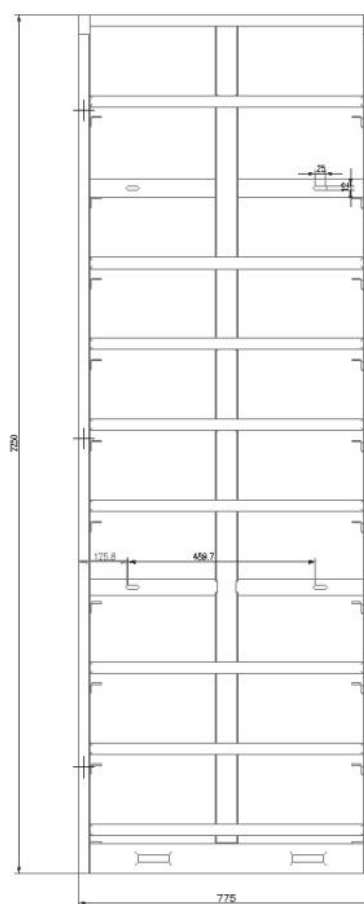

Module	76.8V120AH
Basic Parameters	
Battery System Capacity (kWh)	9.216* n
Battery System Voltage (Vdc)	76.8* n
Battery System Capacity (AH)	120
Battery Module	38.4V240AH
Battery Capacity(kWh)	9.216
Battery Modules Qty. (Optional)	1~9
Battery System Charge Upper-Voltage	86.4* n
Standard Operation Current(A)	120
Normal Operation Current(A)	120
Max. Operation Current(A)	150
Battery System Discharge lower-Voltage	67.2* n
Round-trip efficiency (@0.5C-rate)	95%
Depth of Discharge	90%
Dimension(W* D* H, mm)	551×732.5×2270(mm)
Communication	CANBUS/Modbus RTU/TCP/IP
Weight (kg)	~95kg* n
Operation Life	15+Years
Operation Temperature	10~40℃
Storage Temperature	-20~60℃
Humidity	5 – 95%(without condensing)
Altitude (m)	<4000
Product Certificate	IEC62619/CE/UN38 .3

Control confluence cabinet

The bus cabinet is the dc side bus control unit of the energy storage battery system, which is connected with the high voltage box and storage.

Intermediate unit capable of converter; The power pool system (stack) is installed in the bus cabinet.

Switch off/circuit breaker (optional), three-level BMS (ESMU), and UPS power supply. Confluence ark.

The electrical characteristics, heat dissipation performance and safety performance of each component have been fully considered in the design.

And operation and maintenance, reasonable space layout, with compact structure, flexible configuration, security.

Full reliability and other characteristics. Three stage BMS module (ESMU) in the bus cabinet, with CAN,

Rs-485, RJ45 Ethernet communication interface, can be realized with high voltage box, PCS/UPS or

The communication function between EMS realizes the data communication and control of the energy storage battery management system and protection.



No	Item	Para Range	Quantity	Function	Remark
1	DC Breaker	630/1500/1250A	1	Main loop protection	
2	BMS	ESMU- 10 II	1	Display communication contro	
3	Switching power supply	35W/75W 24V	1	Power Supply	
4	Miniature circuit breaker	S202-C64/20/10	/	Switch	
5	Emergency stop switch	LA38-22ZS	1	scram protection	
6	Repeaters	CR-MX024DC2L	/	Signal control and conversion	
7	LED instruction	ED16-22DSR(G/Y/R)	/	status indicator	
8	Surge protective devices (spd)	Ex9UEP 20 3P	1	Lightning protection bus	
9	Fuse	DC1500/1000V 300A	1	protection	
10	Terminal strip		/	Communication power signal conversion	